

GP-720, Compact,

High Performance

GNSS Smart Antenna Module

Overview

GP-720 is a thin module equipped with the **u-blox 7** low-power, high-sensitivity engine, GNSS antenna.

GP-720 allows switching between GPS and GLONASS. It default works with GPS and QZSS.

Based on our experienced design, GP-720 provides not only excellent GPS performance but also quality and delivery assurance.

Applications

- Driving Recorder
- Automatic vehicle location
- Vehicle navigation device
- School Bus / Transit / Police / Fleet / POS

Features


- GPS, QZSS, GLONASS support
- TTL or USB support
- High sensitivity⁺: -161dBm tracking/-147dBm acquisition (GPS)
- Up to 10Hz update rate (default 1Hz)
- OMA SUPL compliant A-GPS support
- SBAS (WAAS, EGNOS, MSAS) support
- Excellent EMI protection

Technical Specifications

Receiver Performance Data⁺

Receiver Type	56-channel u-blox 7 engine GPS & QZSS: L1 C/A, 1575.42MHz, GLONASS: L1OF, 1598.0625~1605.375MHz SBAS: WAAS, EGNOS, MSAS
---------------	--

RoHS
Compliant



Horizontal Position Accuracy	Autonomous: 2.5m (GPS), 4m (GLONASS) SBAS: 2.0m (GPS) (CEP, 50%, 24-hour static, -130dBm)
Velocity Accuracy	<0.1 m/s (speed) <0.5° (heading) (50% @ 30 m/s)
Time Pulse Signal Accuracy	RMS: 30ns (GPS), 50ns (GLONASS) 99%: 60ns (GPS), 100ns (GLONASS)
Time To First Fix (TTFF)	Autonomous (All at -130dBm) Hot start: 1sec (GPS), 1sec (GLONASS) Warm start: 28sec (GPS), 25sec (GLONASS) Cold start: 30sec (GPS), 32 sec (GLONASS)
Sensitivity, dBm (Autonomous)	Acquisition: -147 (GPS), -139 (GLONASS) Tracking: -161 (GPS), -158 (GLONASS)
Navigation. Update Rate	Max. 10Hz Default 1Hz
Max. Altitude	50,000 m
Max. Velocity	500 m/s
Protocol Support	NMEA 0183 v2.3 (compatible to 3.0) GGA, GLL, GSA, GSV, RMC, VTG, TXT
Dynamics	< 4g

⁺ Note. According to IC Spec

Electrical Data

Power Supply	3.1 ~ 5.5 V (TTL); 4.75~5.25V (USB)
Backup power	1.5 ~ 3.5V
Power Consumption	36 mA / average tracking (9 SVs) 13.5uA / backup power (module disabled)
USB I/O (V)	V _{IH} : 2 ~ VCC, V _{IL} : 0 ~ 0.8 V _{OH} : ≥ 2.8, V _{OL} : ≤ 0.3
Digital I/O (V)	V _{IH} : 0.7*VCC ~ VCC+0.5

V_{IL} : 0 ~ 0.2*VCC
V_{OH} : $\geq VCC-0.4$,
V_{OL} : ≤ 0.4


Feature \ Model	A	B	U	V
TTL	Y	Y	-	-
USB	-	-	Y	Y
PPS	Y	-	Y	-
Power Control	-	Y	-	Y

Environmental Data

Operating temperature	-40 ~ 85°C
Storage temperature	-40 ~ 85°C

*This document is subject to change without notice.


Mechanical Data –20 x 20 x 6.6 (mm)

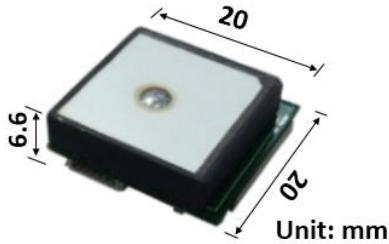

Application

There is an additional pad at the right of the 6-pin header. This pad is reserved for reducing potential electromagnetic noise. For that case, a shielded ground cable would be suggested to connect to motherboard depending on the noise condition.

6-pin Interface, pitch 0.8mm



GP-720A/U

Pin	Name	Function	I/O
1	GND	Ground	Input
2	VCC	Power supply	Input
3	TXD/D+	TTL level serial data output (from GPS) / USB positive	Output / I/O
4	RXD/D-	TTL level serial data input (to GPS) / USB negative	Input / I/O
5	V_BAT	Backup power	Input
6	1PPS	Time Pulse Per Second	Output

GP-720B/V

Pin	Name	Function	I/O
1	GND	Ground	Input
2	VCC	Power supply	Input
3	TXD/D+	TTL level serial data output (from GPS) / USB positive	Output / I/O
4	RXD/D-	TTL level serial data input (to GPS) / USB negative	Input / I/O
5	V_BAT	Backup power	Input
6	PWR_CTL	Power control; floating or high: ON Low : OFF	Input

Ordering Information

GP-720X (X=A,B etc.)